

ILC-LP

Hand Push Dehumidifier

Widely adapted to multiple usage scenarios

Design

1. Metal handle with big wheels for easy transportation.
2. The casing is made of polymer-coated steel, anti-corrosion and long service life.
3. Adopt energy-saving and environmental protection compressor
4. Copper heat hxchanger, Hydrophilic aluminum foil, Internal thread trapezoidal copper pipe
5. Large air inlet in the front, smooth air intake, improve dehumidification efficiency.
6. one machine solves all kinds of moisture problems. multi scene usage: workshop/ factory/ basement/ warehouse/garage/villa/computer room




Features

1. Three types of models for customers to choose
2. Automatic Restart after Power Failure
3. Automatic condensate pump with overflow protection,
4. Timer switch function
5. Low temperature automatic defrost function
6. Hot-gas bypass technology for fast defrost

Big wheels



Large air inlet in the front

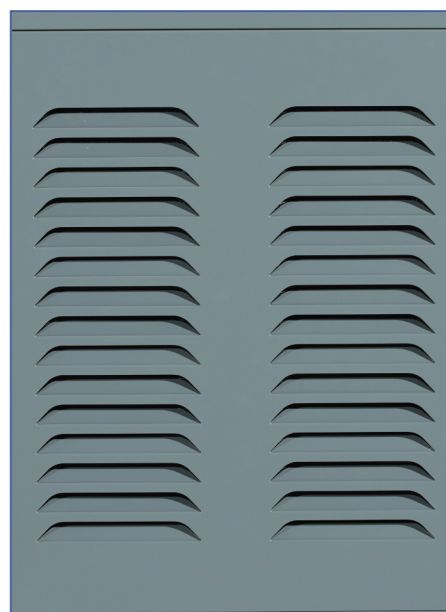

Metal handle for easy transportation



Specifications

Model	ILC-90LP	ILC-138LP	ILC-150LP
Product Type	Hand push Dehumidifier		
Water Removal (L/D) (30°C-80%RH)	90L/D	138L/D	150L/D
Water Removal (L/D) (27°C-60%RH)	45L/D	65L/D	70L/D
Power Supply	220V~240V/50Hz		
Power Consumption	1075W	1215W	1495W
Air Volume	1000m3/H	1300m3/H	1500m3/H
Noise Level	<50db	<55db	
Operating Range	5-38°C		
Applicable area	70-120m ²	100-160m ²	120-200m ²
Filter	G3 filter		
Drainage	Drainage pipe drainage		
Drainage outlet size	16mm		
Compressor	Rotary		
Refrigerant	R410a	R410a	R410a
Product Size	610*450*840 mm	690*530*985 mm	690*530*985 mm
Packing Size	640*510*940mm	710*580*1035mm	710*580*1035mm
Net Weight	48Kg	55Kg	71Kg
Gross Weight	50.4Kg	60.2Kg	75Kg
Customized Services	Support OEM/ODM		

Product Size

